


<b>Brand name</b>	<b>Tenax™-E</b>
<b>Product type</b>	<b>DRNF</b> Dry Reinforcement Non-Crimp Fabric
<b>Product key</b>	<b>710133</b>
<b>Product designation</b>	<b>DRNF HT BA 0388 710133</b>
<b>Construction</b>	<b>0°/90°/PB</b>

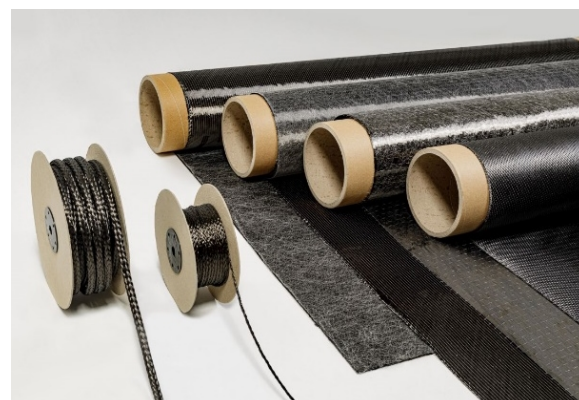

**Detail construction**

Layer	Fiber	Areal weight [g/m <sup>2</sup> ]
<i>Stitch</i> <i>Loop-side</i>		
3	Powder binder	10
2	90°      Tenax™-E HTS45 E23 12K 800tex	194
1	0°      Tenax™-E HTS45 E23 12K 800tex	194
<i>Stitch</i> <i>Tricot-loop</i>		

+ 4 g for stitching yarn

**Product features**

Carbon fiber areal weight incl. sizing	388 g/m <sup>2</sup>
Total areal weight	402 g/m <sup>2</sup>
Fabric width	1270 or 2540 mm
Stitching length	3.0 mm
Paper core dimension	1400/2800 mm x 152.4 mm x 10 mm
Typical roll length	50 m - 100 m

**Process parameter**

- If veil based toughening technology is part of the product:  
It is developed for all resin infusion processes with curing temperature of approx. 180 °C.
- If powder binder is part of the product:  
The preform recommendation is to apply vacuum on preform package and hold for 20 min. at 120 °C.

- All data shown are typical values representative of the material and cannot be guaranteed. Properties may vary depending on samples preparation and test methods.
- For each shipment an inspection certificate is generated and supplied.
- A detailed customer specification is arranged on request.
- The export or transfer of carbon fiber products can be subject to authorization, depending on end-use and final destination.